




NIMBUS[®]
LIGHTS



NIMBUS[®]
LIGHTS

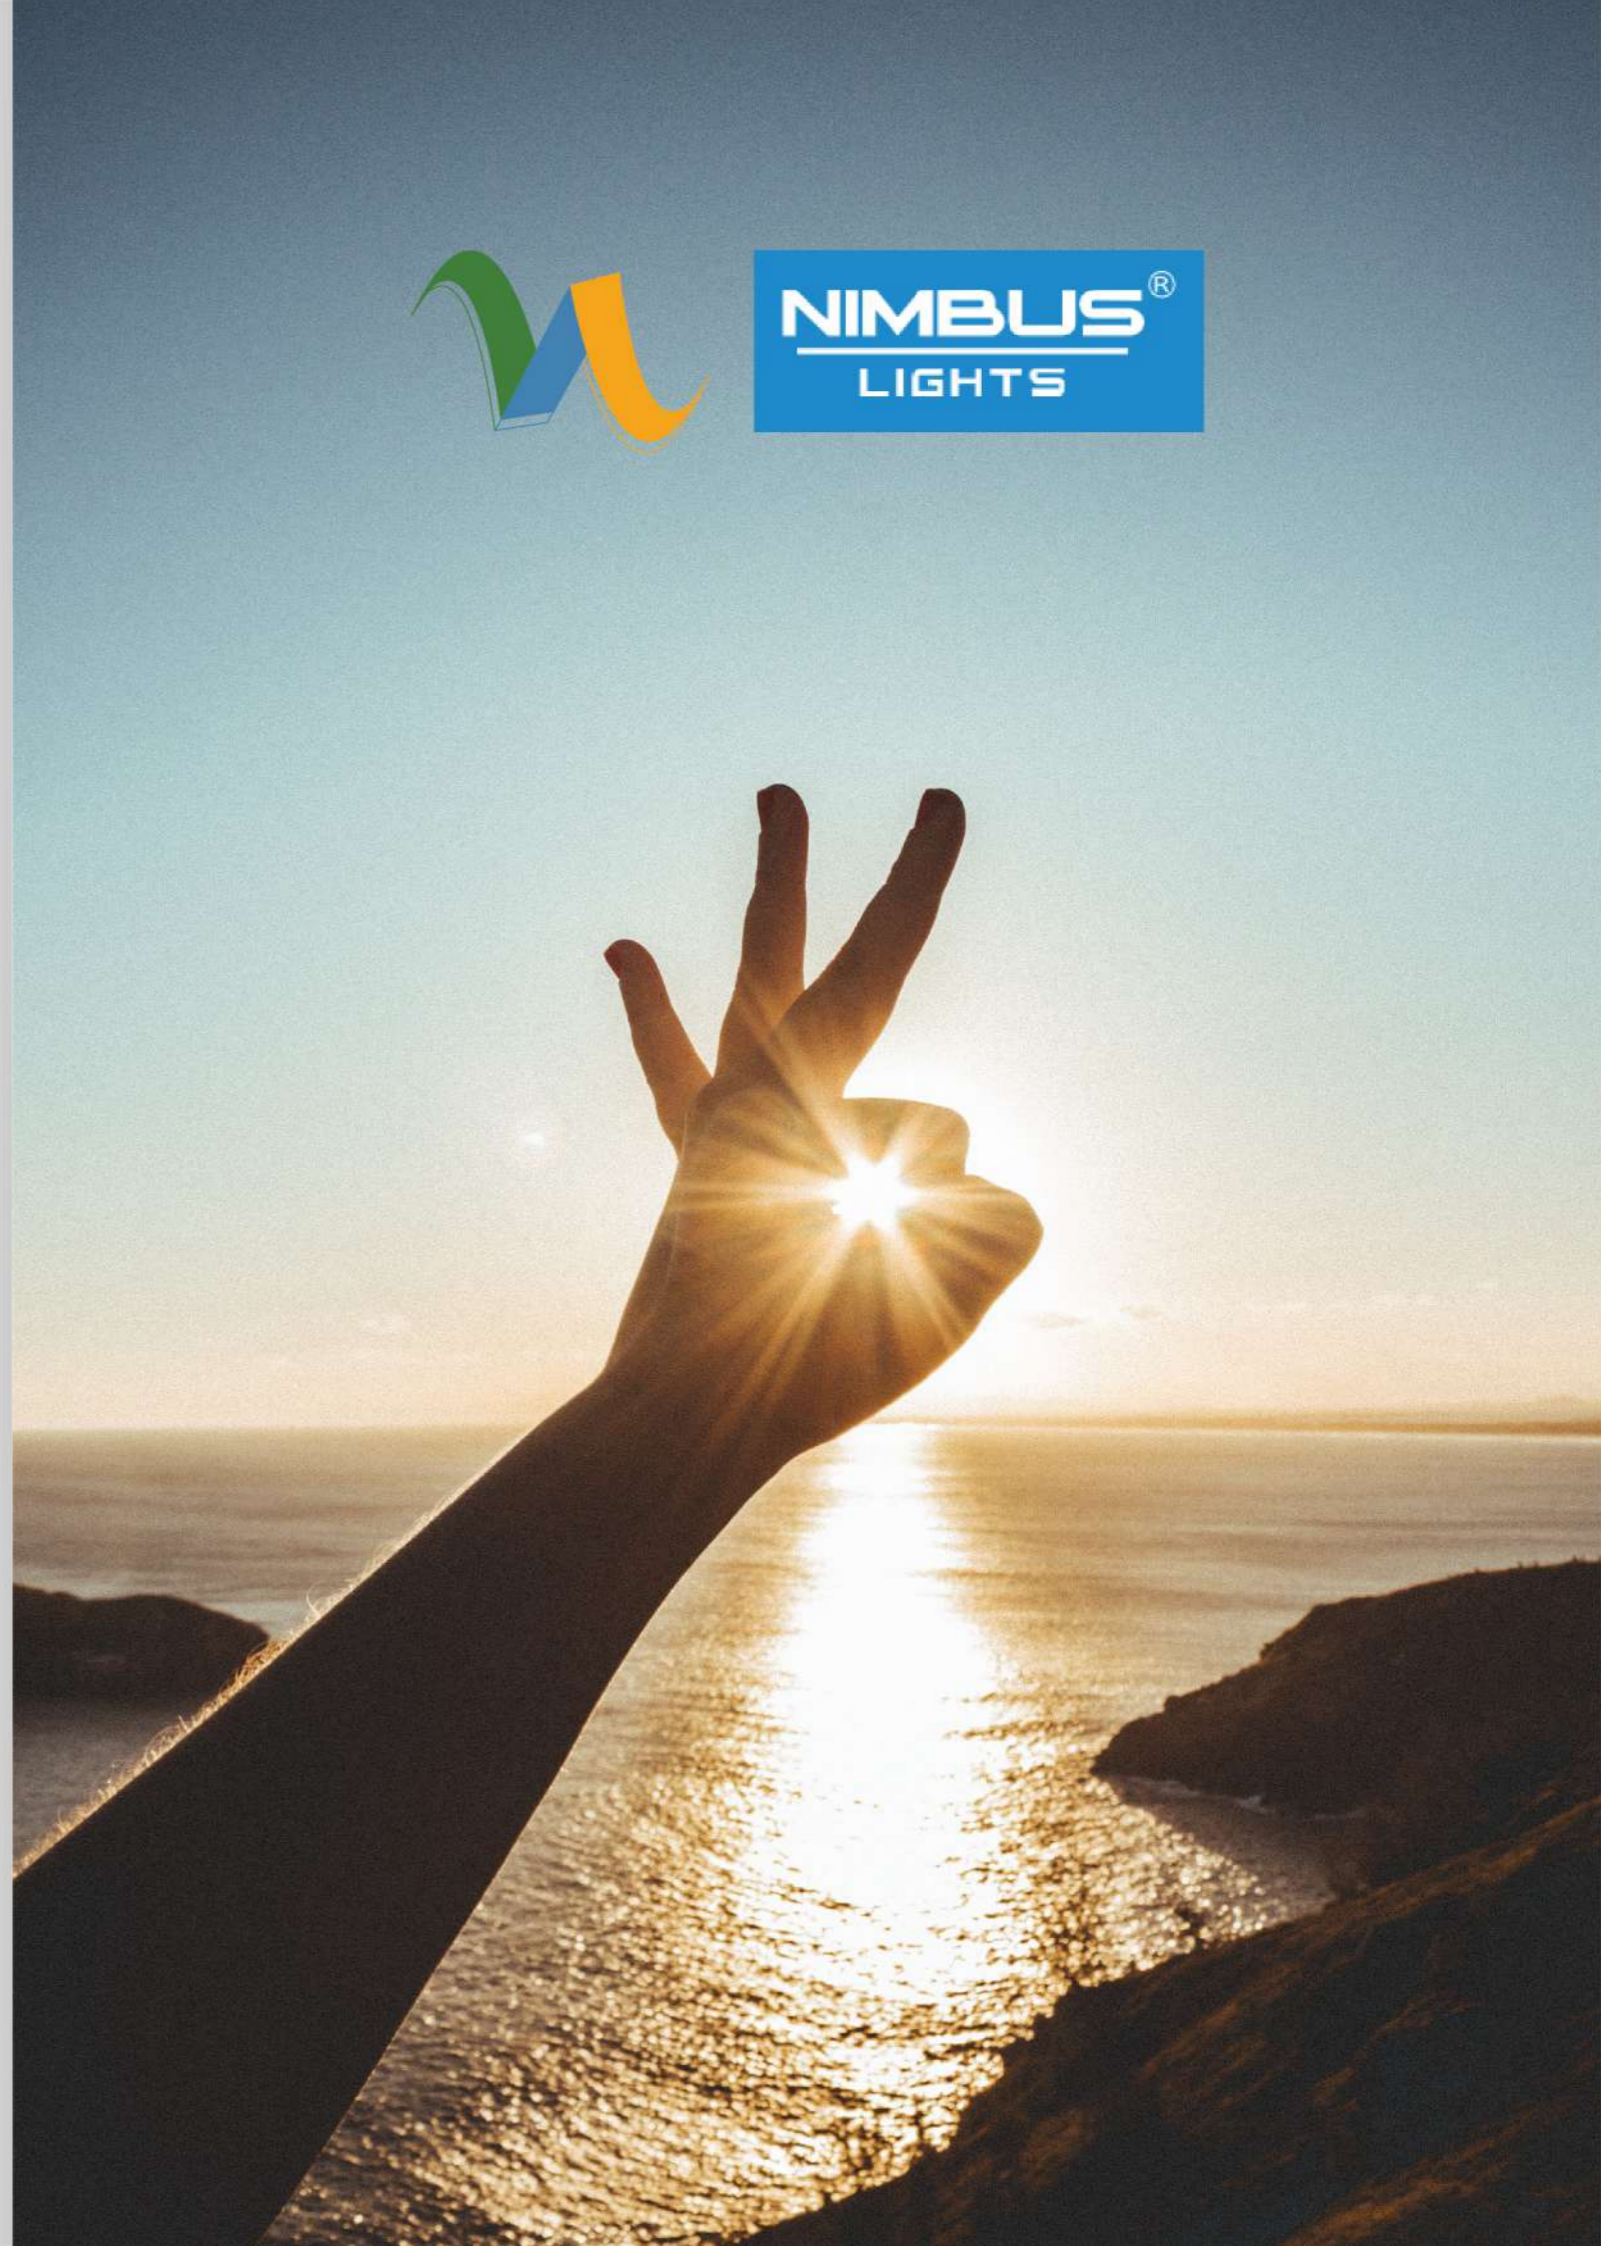

CONTENT

◇ ABOUT US	01
◇ LED PANEL LIGHT	
NP 01/02	03
NP 03/04	05
NP 03/04 (TRI-COLOUR)	07
CORUS	09
MS 01/02	11
◇ LED SURFACE LIGHT	
NP 05/06	13
601	15
◇ LED COB LIGHT	
NP 07	17
401	19
NP 09R	21
NP 09S	23

◇ LED ZOOM & TRACK LIGHT	
NP 10 TRACK LIGHT	25
NP 10 WALL SPOT	27
401A	29
401B	31
◇ LED T5 LIGHT	
901	33
◇ LED FLOOD & STREET LIGHT	
NP 08	35
701	37
801	39
◇ LED HIGHBAY	
1001	41
◇ LED STRIP LIGHT	43
◇ LED ROPE LIGHT	44
◇ MS 06 (JUNCTION BOX)	45
◇ LINEAR PROFILE	
CONCEALED	47
SURFACE	49
◇ OUTDOOR	51



WHO WE ARE



1



2



3



4



5



6

At Nimbus Light, we have been providing lighting solutions for more than two decades with a well-established customer base at both local and national market. Right since the time we started, we have carved out a niche for ourselves with a focus on providing continuous quality improvement to our customers.

In the dynamic and ever more complex lighting market, customers are provided with optimal advice, ideal orientation and perfect lighting. To ensure this, Nimbus Lights offers a wide portfolio of products ranging from domestic to industrial solutions.

Our mission has always been to offer a comprehensive package of services with timely delivery of excellent quality with consistency in the lighting industry.

NP 01/02

LED PANEL LIGHTS



EPISTAR



FEATURES

UNIQUE & ELEGANT DESIGN.
EXQUISITE AND GOOD
ILLUMINATION PERFORMANCE

SCOPE & APPLICATION

USED IN ARTISTIC. RESIDENCE,
HOTELS, BOUTIQUES, LIESURE
SPACE ETC.



Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	Hole Size
8W	WH/NW/WW	2835	95-105LM	80	<0.95	120°	100MM	75MM
16W	WH/NW/WW	2835	95-105LM	80	<0.95	120°	150MM	125MM
24W	WH/NW/WW	2835	95-105LM	80	<0.95	120°	200MM	175MM

NP 03/04

LED PANEL LIGHTS



EPISTAR

FEATURES

EXCELLENT HEAT DISSIPATION,
STRONG ALUMINIUM HOUSING,
MAXIMUM EFFICIENCY WITH
MINIMUM GLARE.

SCOPE & APPLICATION

RESIDENCE, HOSPITALS, OFFICES,
COMMERCIAL SPACE ETC.



Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	Hole Size
8W	WH/NW/WW	2835	85-95LM	80	<0.95	120°	125MM	100MM
15W	WH/NW/WW	2835	85-95LM	80	<0.95	120°	175MM	150MM
22W	WH/NW/WW	2835	85-95LM	80	<0.95	120°	225MM	200MM
48W	WH/NW/WW	2835	85-95LM	80	<0.95	120°	600MM	580MM

NP 03/04

TRI COLOUR PANEL LIGHT

WARM
WHITE

NEUTRAL
WHITE

COOL
WHITE



EPISTAR

FEATURES

EXCELLENT HEAT DISSIPATION,
STRONG ALUMINIUM HOUSING,
MAXIMUM EFFICIENCY WITH
MINIMUM GLARE.

SCOPE & APPLICATION

RESIDENCE, HOSPITALS, OFFICES,
COMMERCIAL SPACE ETC.

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	Hole Size
6W	WH, NW, WW	2835	85-95LM	80	<0.5	120°	125MM	100MM
12W	WH, NW, WW	2835	85-95LM	80	<0.5	120°	175MM	150MM
18W	WH, NW, WW	2835	85-95LM	80	<0.5	120°	225MM	200MM

Corus

LED PANEL LIGHT



FEATURES

EXCELLENT HEAT DISSIPATION,
STRONG ALUMINIUM HOUSING,
MAXIMUM EFFICIENCY WITH
MINIMUM GLARE.

SCOPE & APPLICATION

RESIDENCE, OFFICES, HOTELS,
COMMERCIAL SPACE ETC.

EPISTAR

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	Hole Size
5W	WH/WW/NW	2835	85-95LM	80	<0.5	120°	100MM	75MM
10W	WH/WW/NW	2835	85-95LM	80	<0.95	120°	125MM	100MM
15W	WH/WW/NW	2835	85-95LM	80	<0.95	120°	175MM	150MM
22W	WH/WW/NW	2835	85-95LM	80	<0.95	120°	225MM	200MM



MS 01/02

LED PANEL LIGHT



FEATURES

EXCELLENT HEAT DISSIPATION,
STRONG ALUMINIUM HOUSING,
MAXIMUM EFFICIENCY WITH
MINIMUM GLARE.

SCOPE & APPLICATION

RESIDENCE, OFFICES, HOTELS,
COMMERCIAL SPACE ETC.

EPISTAR

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	Hole Size
3W	WH/NW/WW/B/P/G	2835	85-95LM	80	<0.5	120°	100MM	75MM
8W	WH/NW/WW	2835	85-95LM	80	<0.5	120°	125MM	100MM
15W	WH/NW/WW	2835	85-95LM	80	<0.5	120°	175MM	150MM
22W	WH/NW/WW	2835	85-95LM	80	<0.5	120°	225MM	200MM

NP 05/06

LED SURFACE LIGHT



EPISTAR




FEATURES

UNIQUE & ELEGANT DESIGN
EXQUISITE AND GOOD
RADIABILITY PERFORMANCE.

SCOPE & APPLICATION

RESIDENCE, HOTELS
RESTAURANTS,
COMMERCIALS.

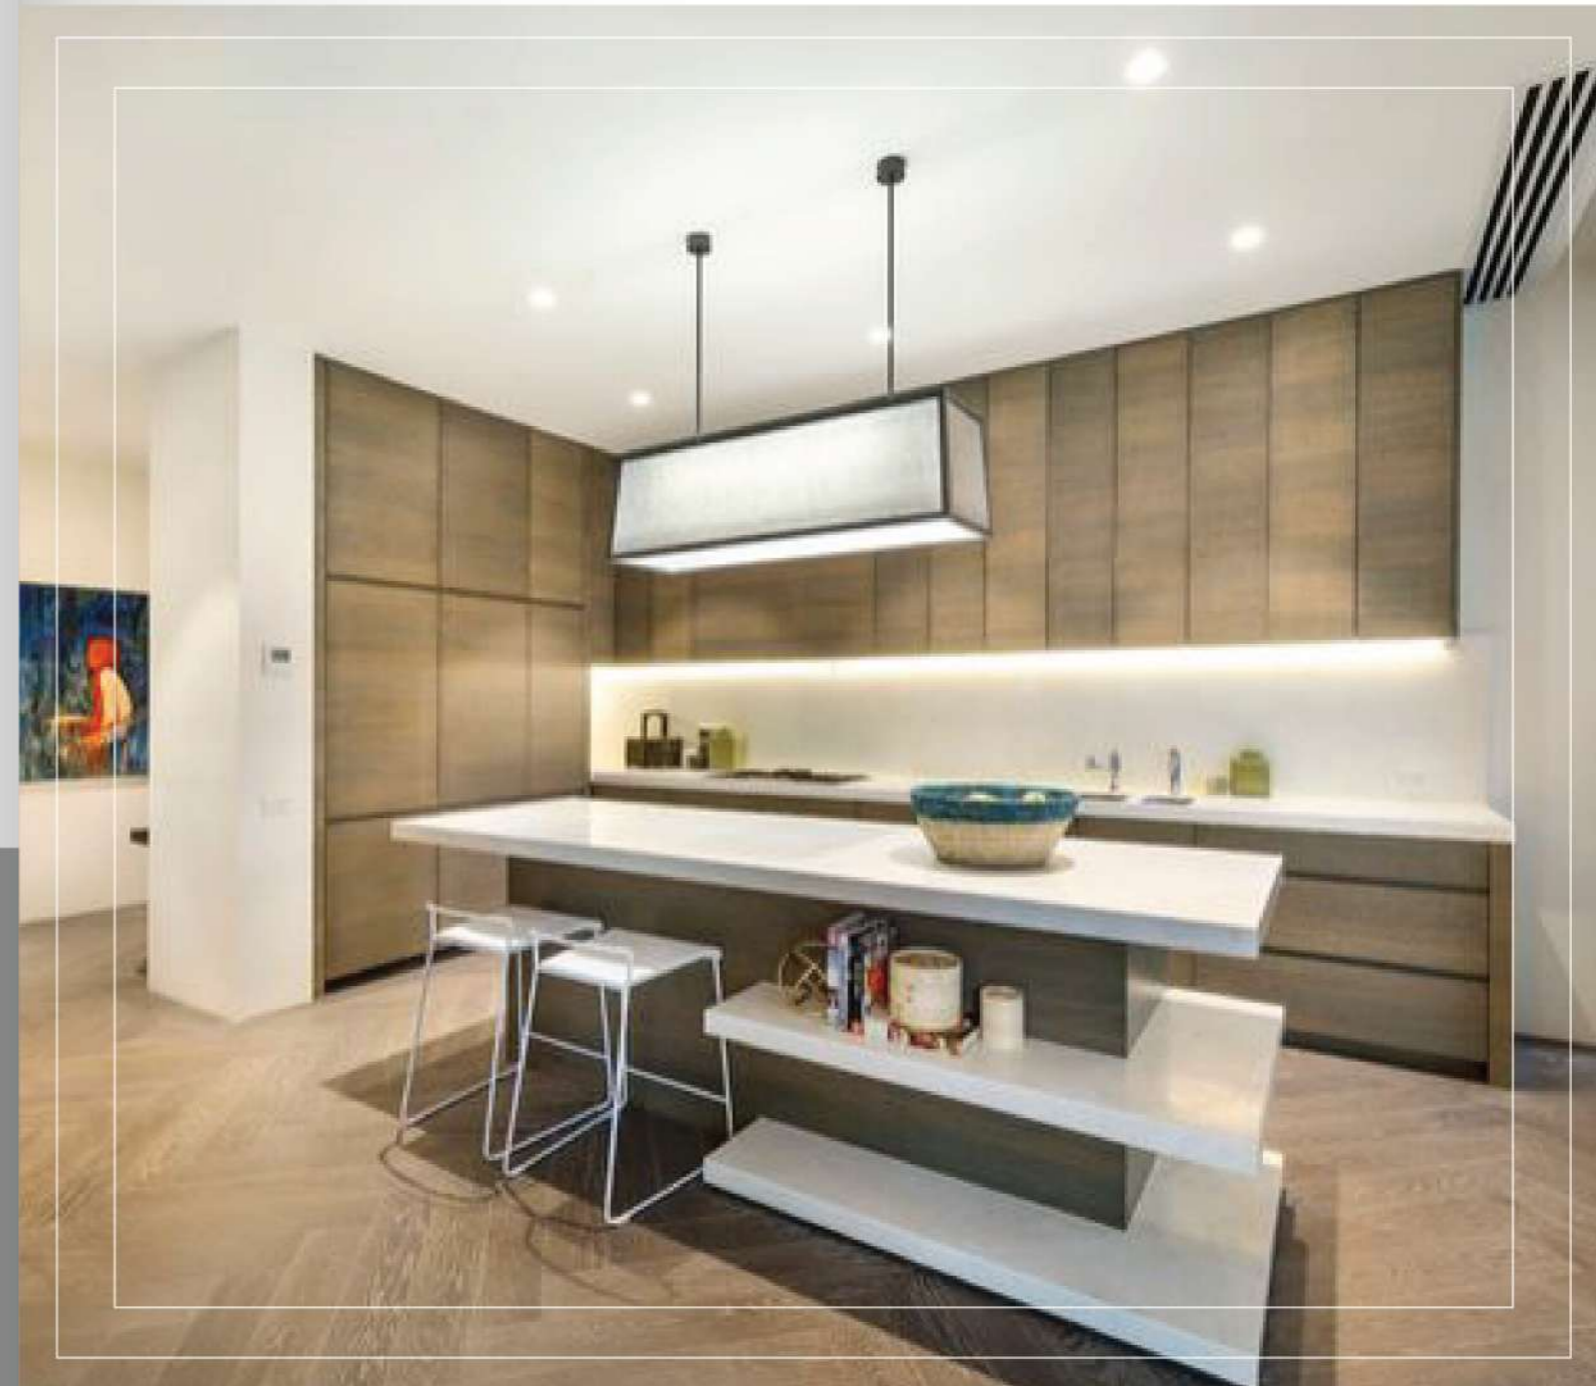

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size
8W	WH/NW/WW	2835	95-105LM	80	<.095	120°	75MM
16W	WH/NW/WW	2835	95-105LM	80	<.095	120°	130MM
24W	WH/NW/WW	2835	95-105LM	80	<.095	120°	175MM

601

LED SURFACE LIGHT



EPISTAR



FEATURES

EXCELLENT HEAT DISSIPATION
WITH MAXIMUM EFFICIENCY
& MINIMUM CLARE.

SCOPE & APPLICATION

RESIDENCE,
HOTELS ETC.

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size
8W	WH/NW/WW	2835	85-95LM	80	<.095	120°	75MM
15W	WH/NW/WW	2835	85-95LM	80	<.095	120°	130MM
20W	WH/NW/WW	2835	85-95LM	80	<.095	120°	170MM

NP 07

LED COB LIGHT

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	Hole Size
3W	WH/NW/WW	COB	95-105LM	80	<0.5	45°	45MM	37MM
5W	WH/NW/WW	COB	95-105LM	80	<0.5	45°	45MM	40MM
7W	WH/NW/WW	COB	95-105LM	80	<0.5	45°	60MM	52MM
12W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	80MM	73MM
18W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	90MM	85MM

FEATURES

EXTRUDED ALUMINIUM HEAT SINK AND FACETED REFLECTOR.

SCOPE & APPLICATION

SHOWROOM,
RESTAURANT,
HOTELS ETC.



bridgelux.



401

LED COB LIGHT



FEATURES

EXTRUDED ALUMINIUM HEAT SINK AND FACETED REFLECTOR AND CLEAR FRONT GLASS.

SCOPE & APPLICATION

SHOWROOM, RESTAURANT, HOTELS ETC.

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	Hole Size
1W	WH/WW/B/P/G	COB	95-105LM	80	<0.5	120°	30MM	25MM
3W	WH/NW/WW	COB	95-105LM	80	<0.5	120°	38MM	28MM
7W	WH/NW/WW	COB	95-105LM	80	<0.5	45°	85MM	63MM
12W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	88MM	65MM
18W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	120MM	92MM
24W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	155MM	115MM
30W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	155MM	130MM
40W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	155MM	130MM

NP 09R

LED COB LIGHT



Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size
7W	WH/NW/WW	COB	95-105LM	80	<0.5	45°	50MM
12W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	70MM
18W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	90MM



FEATURES

UNIQUE & ELEGANT DESIGN
EXQUISITE AND GOOD
RADIABILITY PERFORMANCE.

SCOPE & APPLICATION

RESIDENCE, HOTELS
RESTAURANTS,
COMMERCIALS.

NP 09S

LED COB LIGHT



FEATURES

UNIQUE & ELEGANT DESIGN
EXQUISITE AND GOOD
RADIABILITY PERFORMANCE.

SCOPE & APPLICATION

RESIDENCE, HOTELS
RESTAURANTS,
COMMERCIALS.

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size
12W	WH/NW/WW	COB	95-105LM	80	<0.95	45°	70MM



NP 10

LED TRACKLIGHT



Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle
12W	WH/NW/WW	COB	95-105LM	80	<0.95	45°
18W	WH/NW/WW	COB	95-105LM	80	<0.95	45°
30W	WH/NW/WW	COB	95-105LM	80	<0.95	45°

FEATURES

EXCELLENT HEAT DISSIPATION,
STRONG ALUMINIUM HOUSING
WITH MINIMUM GLARE.

SCOPE & APPLICATION

SHOWROOM.



NP 10

LED WALLSPOT



Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle
12W	WH/NW/WW	COB	95-105LM	80	<0.95	45°
18W	WH/NW/WW	COB	95-105LM	80	<0.95	45°
30W	WH/NW/WW	COB	95-105LM	80	<0.95	45°



FEATURES

EXCELLENT HEAT DISSIPATION,
STRONG ALUMINIUM HOUSING
WITH MINIMUM GLARE.

SCOPE & APPLICATION

SHOWROOM.

401A

LED ZOOM LIGHT




FEATURES

EXTRUDED ALUMINIUM HEAT SINK AND FACETED REFLECTOR AND CLEAR FRONT GLASS.

SCOPE & APPLICATION

SHOWROOM, RESTAURANT, HOTELS ETC.

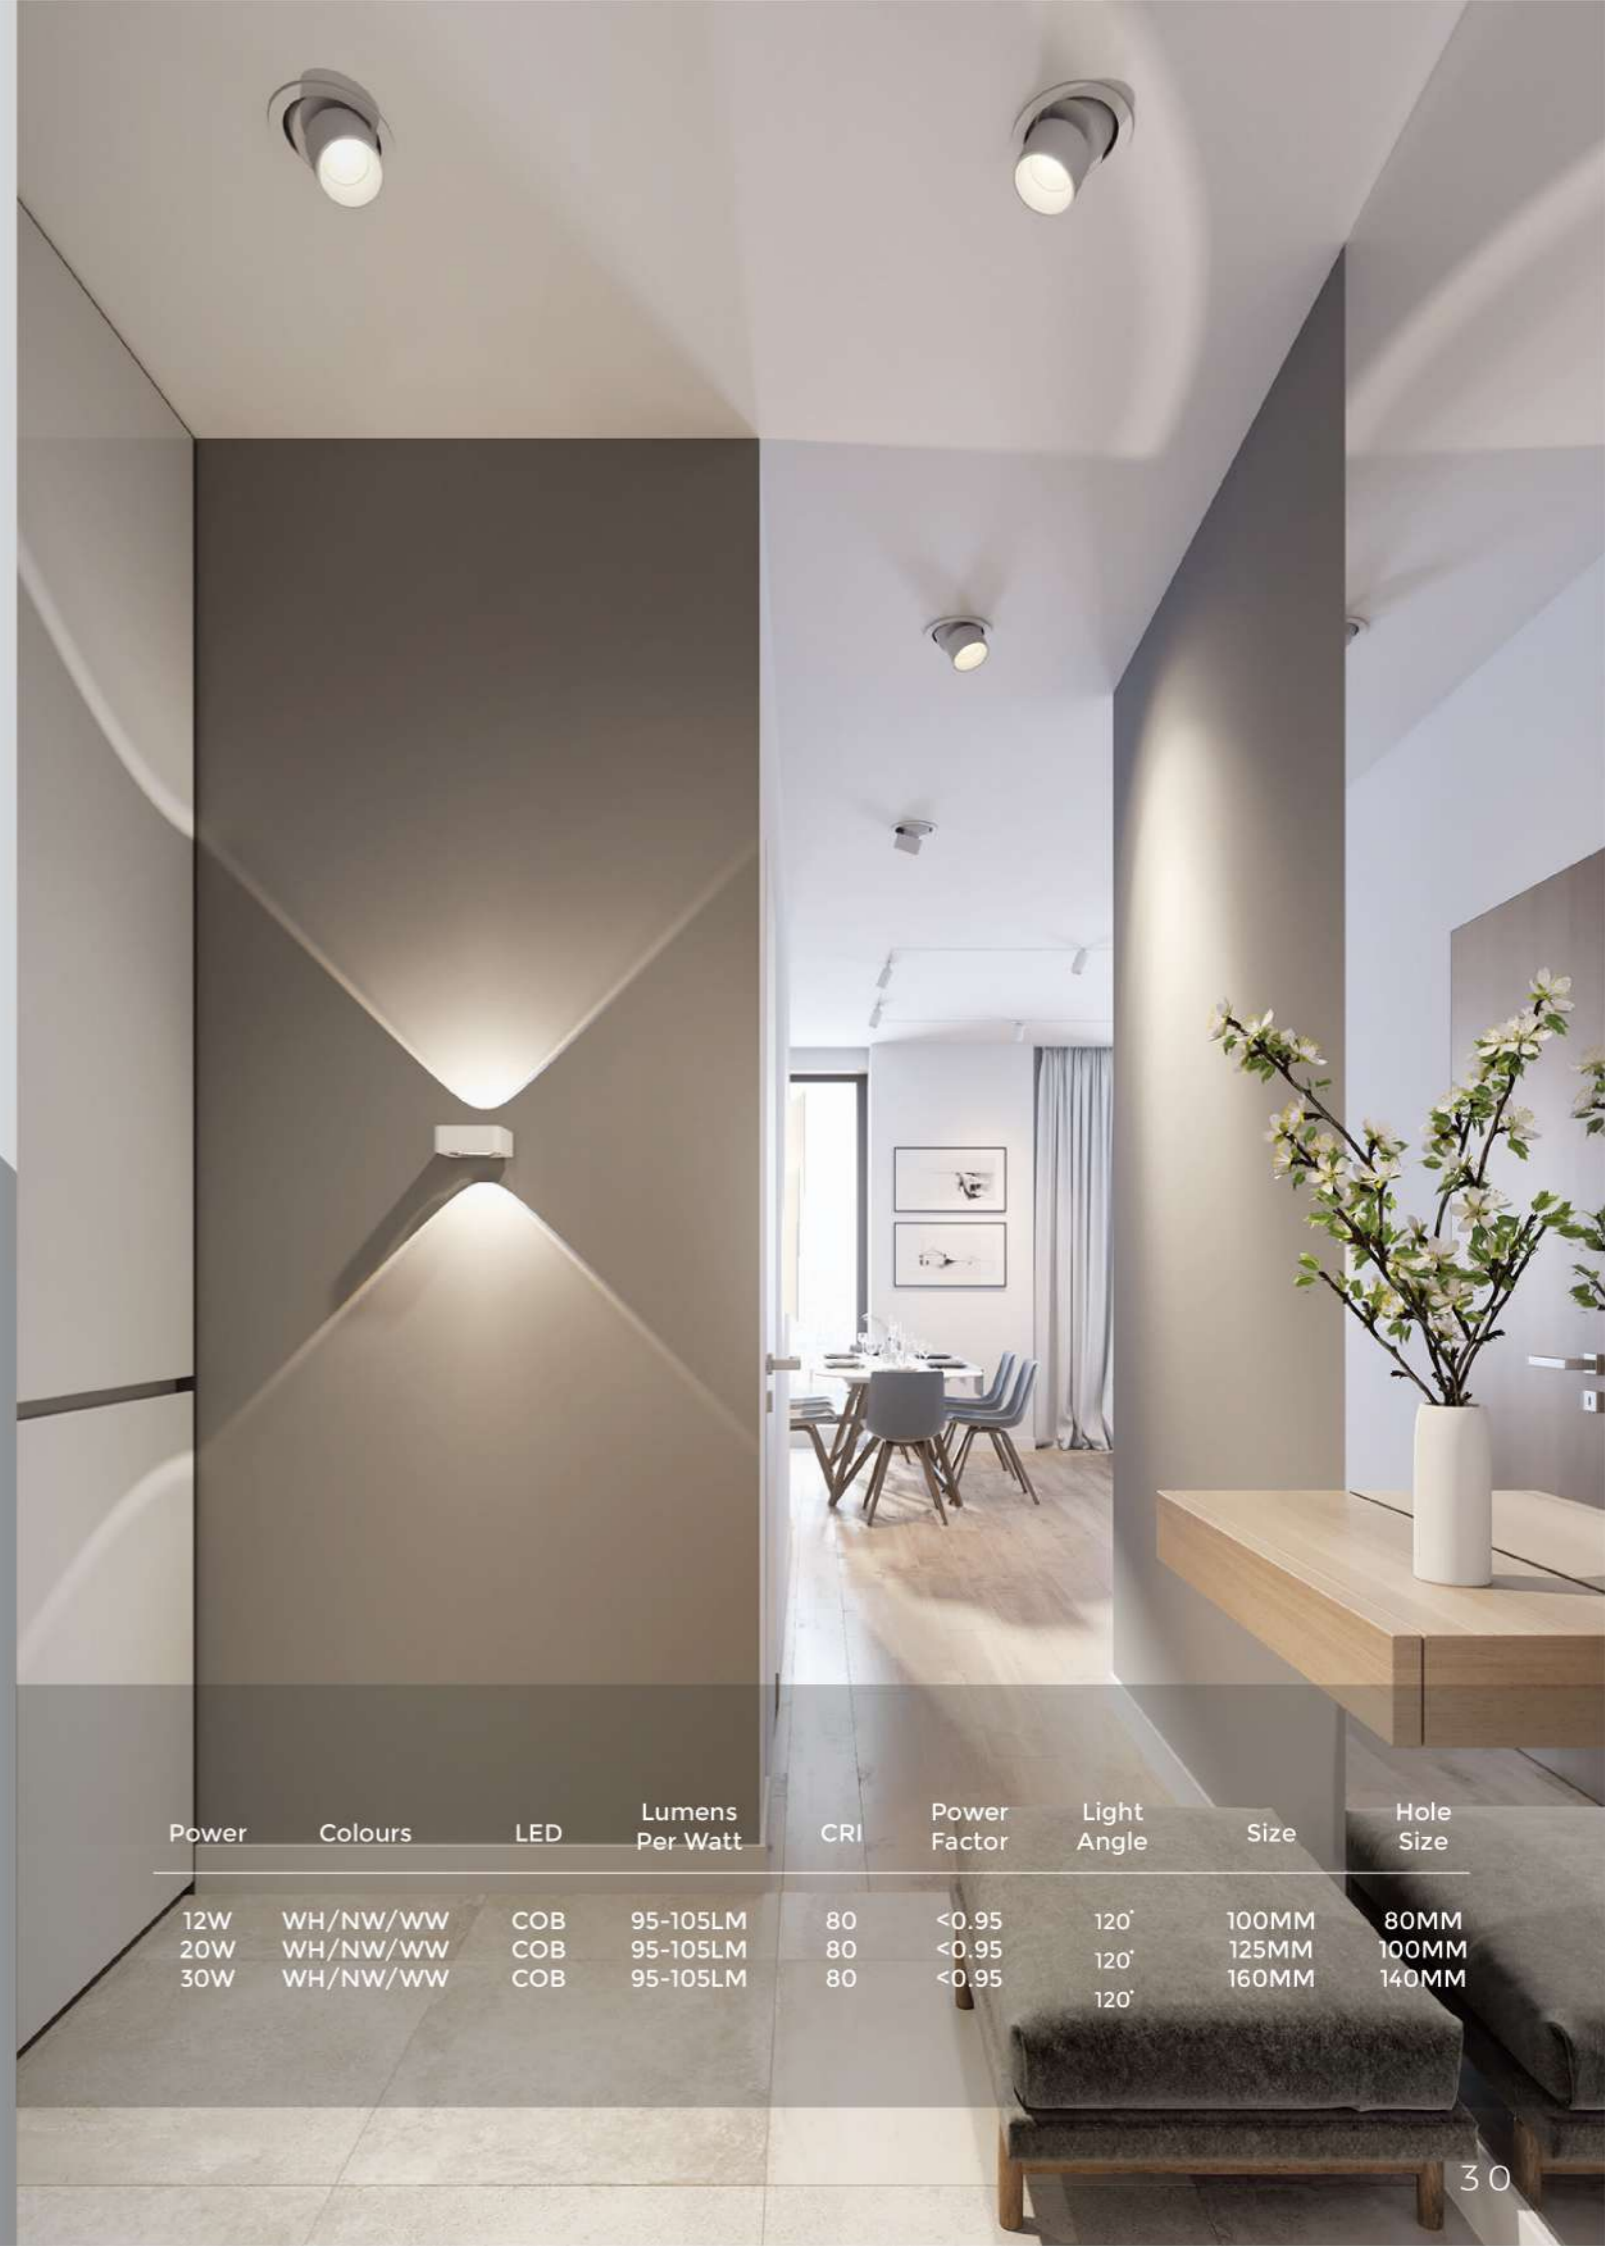

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	Hole Size
12W	WH/NW/WW	COB	95-105LM	80	<0.95	120°	100MM	80MM
20W	WH/NW/WW	COB	95-105LM	80	<0.95	120°	125MM	100MM
30W	WH/NW/WW	COB	95-105LM	80	<0.95	120°	160MM	140MM

401B

LED TRACKLIGHT



FEATURES

EXCELLENT HEAT DISSIPATION,
STRONG ALUMINIUM HOUSING
WITH MINIMUM GLARE.

SCOPE & APPLICATION SHOWROOM.



Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle
15W	WH/NW/WW	COB	95-105LM	80	<0.95	120°
20W	WH/NW/WW	COB	95-105LM	80	<0.95	120°
30W	WH/NW/WW	COB	95-105LM	80	<0.95	120°

901

LED T5 LIGHT



FEATURES

ALUMINIUM HEAT SINK WITH FROSTED POLYCARBONATE DIFFUSER AND HIGH GRADE PVC BATTEN.

SCOPE & APPLICATION

COMMERCIAL SPACES,
RESIDENCE, OFFICES,
HOTELS ETC.



Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Size
4W	WH	2835	100LM	80	<0.5	300MM
10W	WH	2835	100LM	80	<0.95	600MM
20W	WH	2835	100LM	80	<0.95	1200MM
26W	WH	2835	100LM	80	<0.95	1200MM

NP 08

LED FLOODLIGHT



EPISTAR



FEATURES

DIECAST ALUMINIUM HEAT SINK
& PREMIUM GRADE REFLECTOR.

SCOPE & APPLICATION

CONSTRUCTION INDUSTRY,
PETROL BUNKS,
COMMERCIAL APPLICATION.

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	LED
50W	WH/WW	2835	95-105LM	80	<.095	120°	45MM	37MM

701


LED FLOODLIGHT

FEATURES

DIECAST ALUMINIUM HEAT SINK
AND TOUGHENED GLASS &
PREMIUM GRADE REFLECTOR

SCOPE & APPLICATION

CONSTRUCTION INDUSTRY,
PETROL BUNKS,
COMMERCIAL APPLICATION.

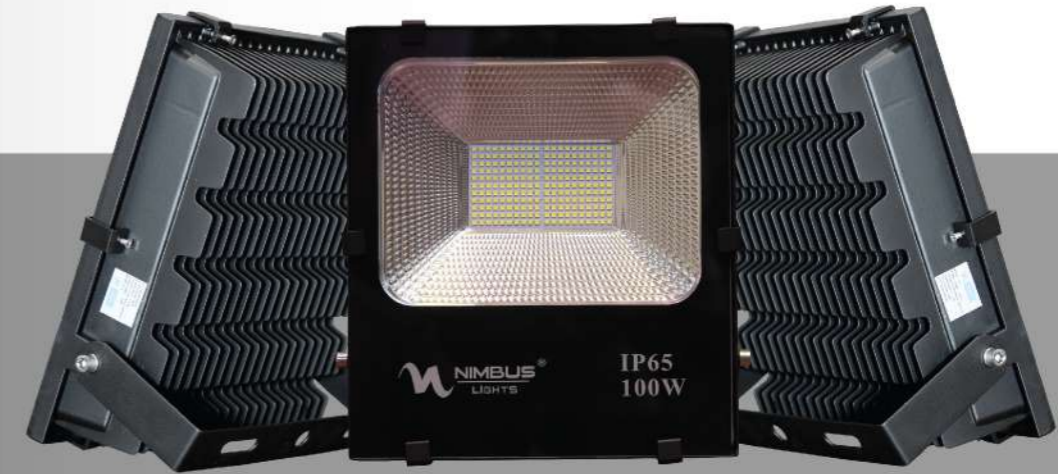

EPISTAR

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle
30W	WH/WW	SMD	95-105LM	80	<0.95	120°
50W	WH/WW	SMD	95-105LM	80	<0.95	120°
100W	WH/WW	SMD	95-105LM	80	<0.95	120°
150W	WH/WW	SMD	95-105LM	80	<0.95	120°
200W	WH/WW	SMD	95-105LM	80	<0.95	120°

801

LED STREETLIGHT




EPISTAR

FEATURES

DIECAST ALUMINIUM HEAT SINK
AND TOUGHENED GLASS.

SCOPE & APPLICATION


STREET LIGHT.

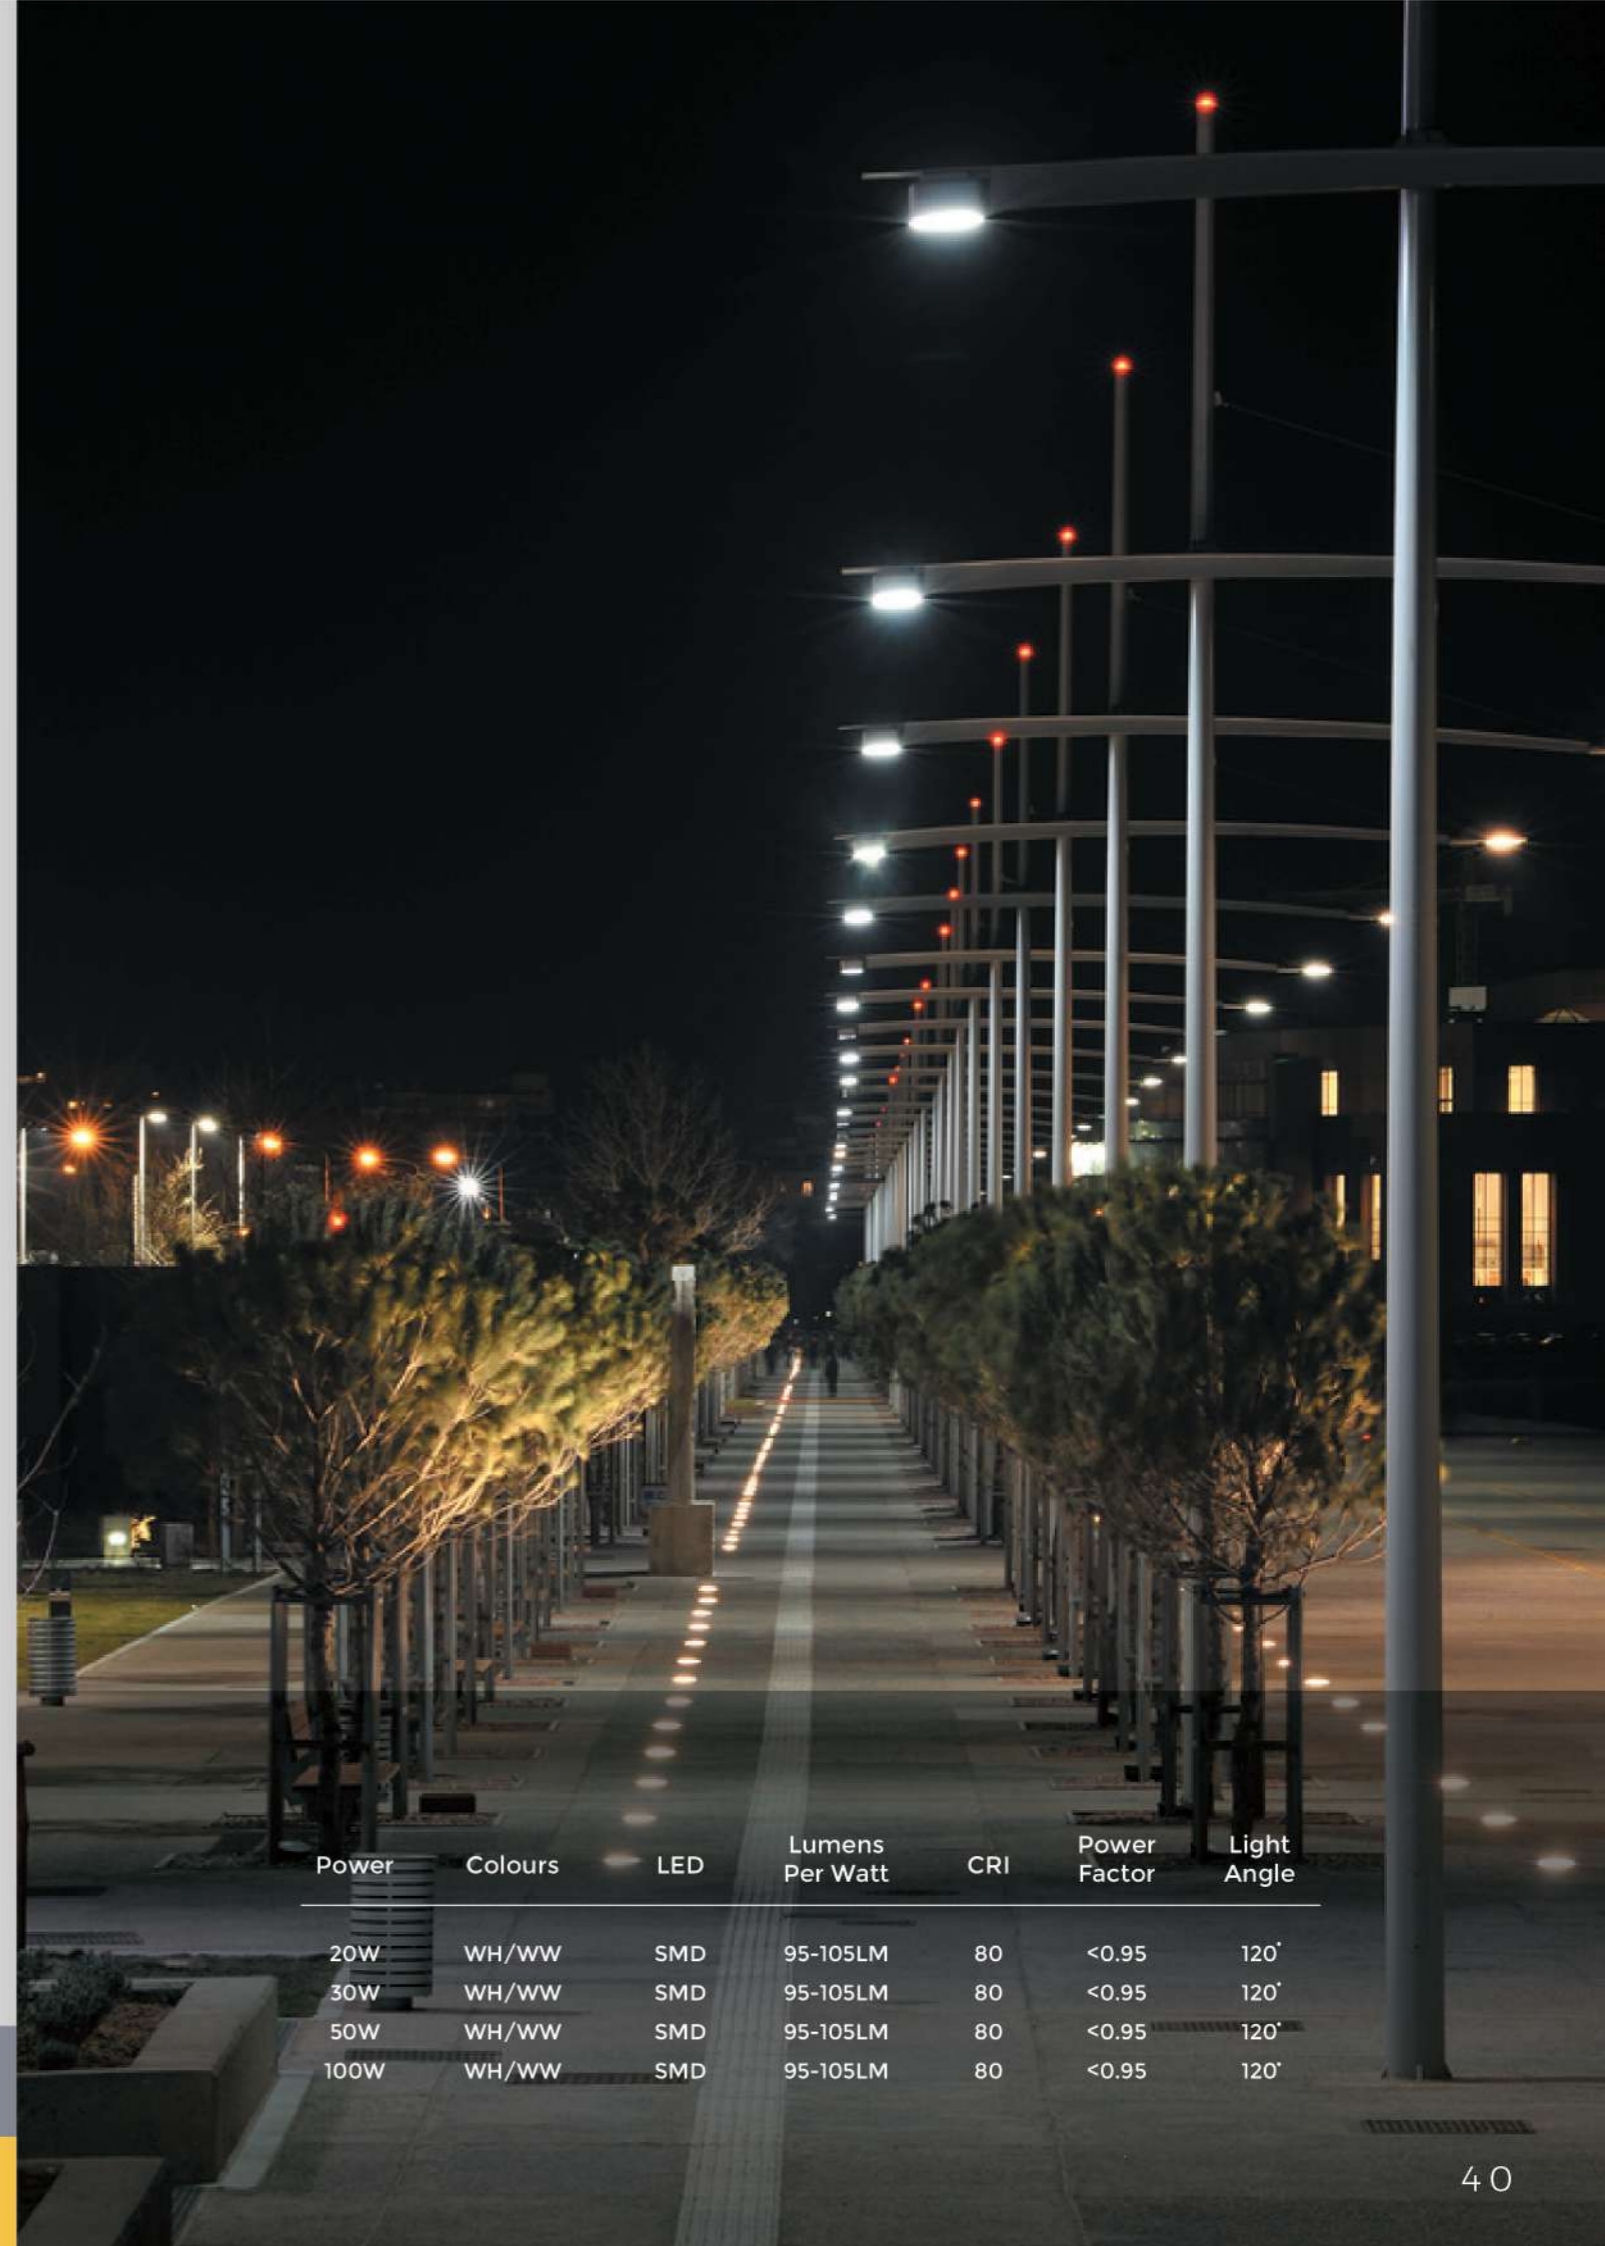

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle
20W	WH/WW	SMD	95-105LM	80	<0.95	120°
30W	WH/WW	SMD	95-105LM	80	<0.95	120°
50W	WH/WW	SMD	95-105LM	80	<0.95	120°
100W	WH/WW	SMD	95-105LM	80	<0.95	120°

1001

LED HIGHBAY

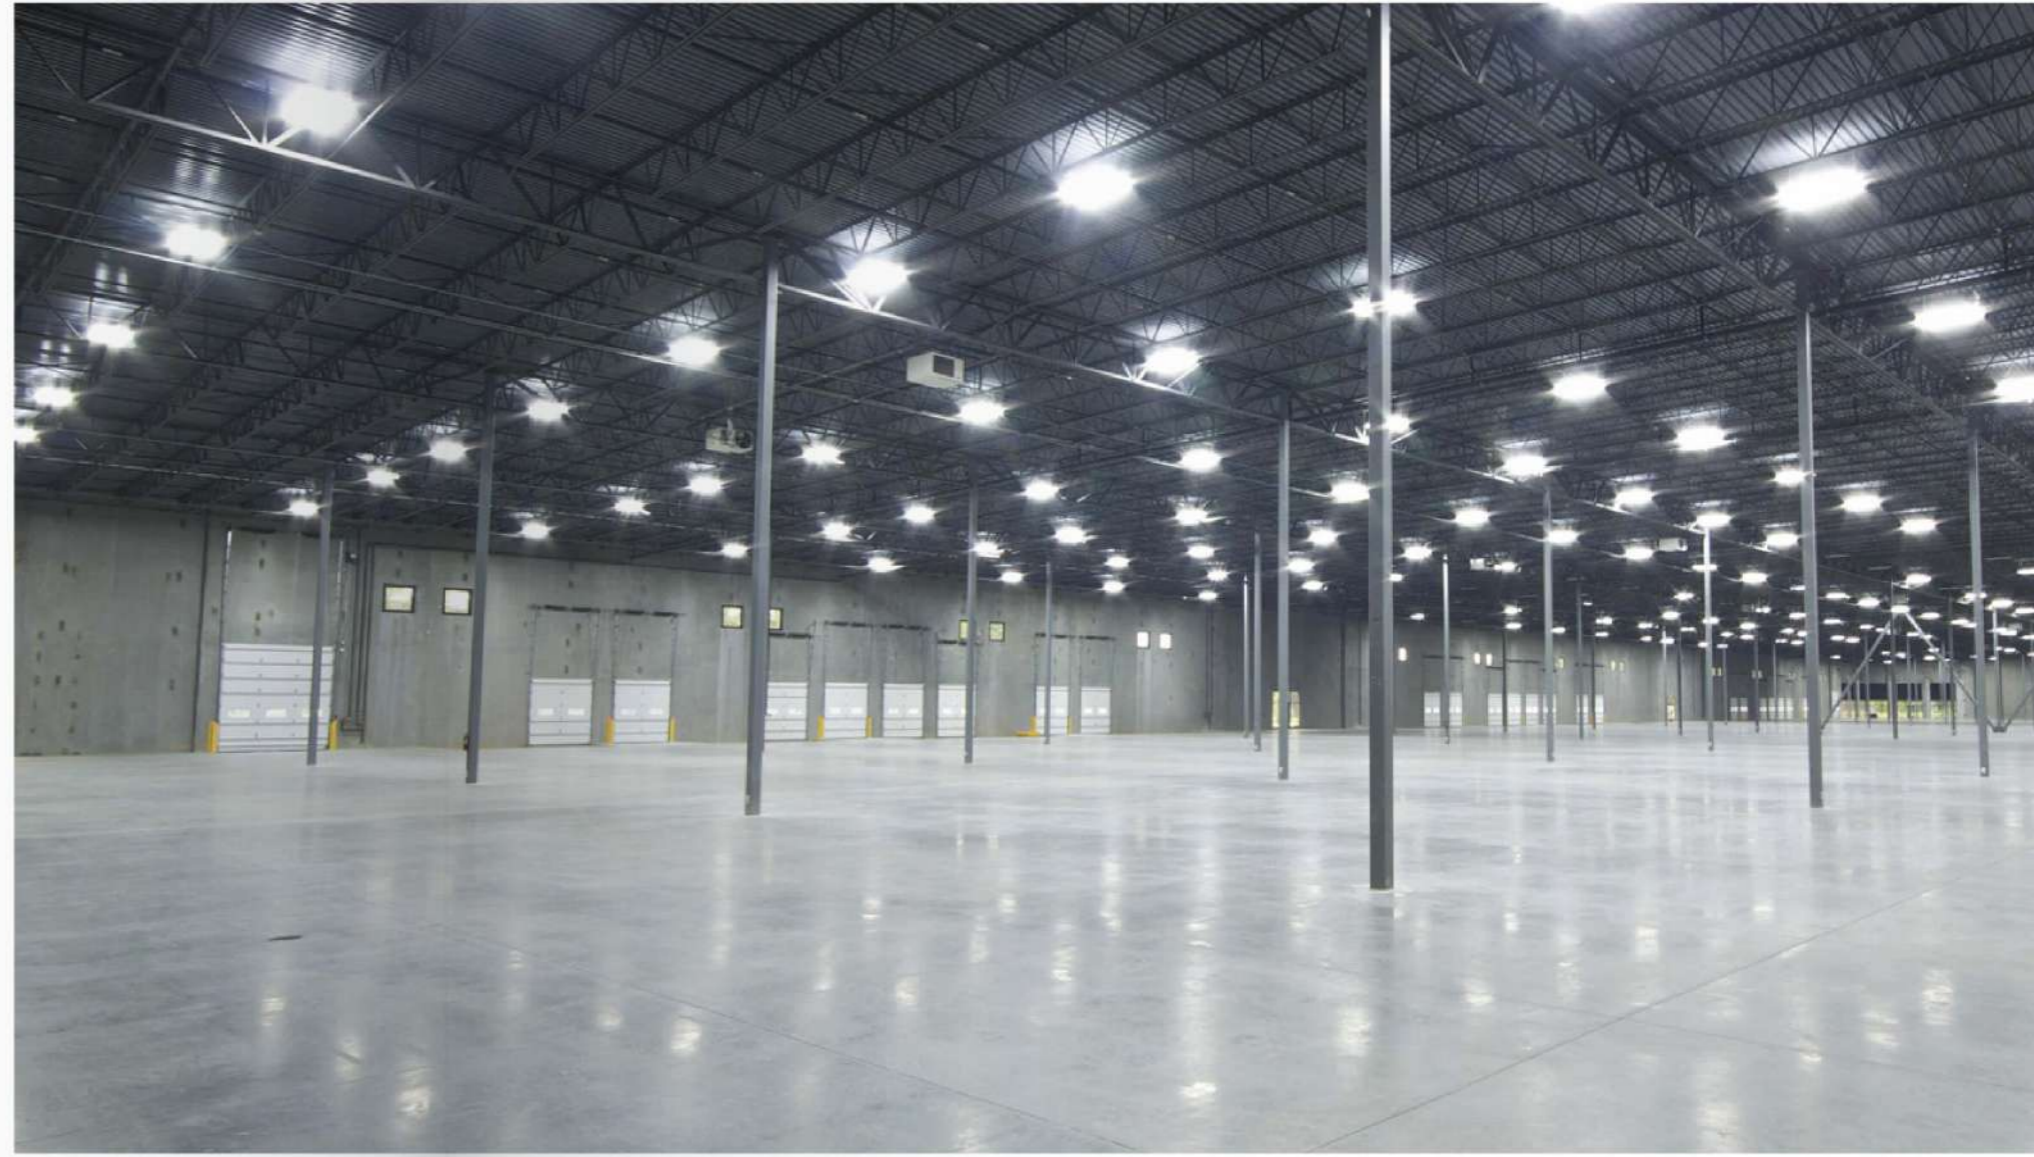

FEATURES

DIECAST ALUMINIUM HEAT SINK
& PREMIUM GRADE REFLECTOR.

SCOPE & APPLICATION

INDUSTRY, WAREHOUSE
WORKPLACE, MALL ETC.

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle
50W	WH	2835	95-105LM	80	<0.95	120°
100W	WH	2835	95-105LM	80	<0.95	120°
150W	WH	2835	95-105LM	80	<0.95	120°

STRIP LIGHT



Particular	Power	Number of LED	Colours
5050	14.4W	60LED	WH/WW/B/P/G
2835	4.8W	60LED	WH/WW/B/P/G
2835	12W	120LED	WH/NW/WW
2835	24W	240LED	WH/NW/WW

ROPE LIGHT



Particular	Power	Number of LED	Colours
2835	12W	120LED	WH/WW/B/P/G/ICEBLUE

MS 06



3W

Power	Colours	LED	Lumens Per Watt	CRI	Power Factor	Light Angle	Size	LED
3W	WH/WW/B/P/G	SMD	95-105LM	80	<0.5	120°	80MM	25MM
6W	WH/WW/B/P/G/3C	SMD	95-105LM	80	<0.5	120°	100MM	75MM




6W

LINEAR PROFILE

Concealed Profile



PXG 205

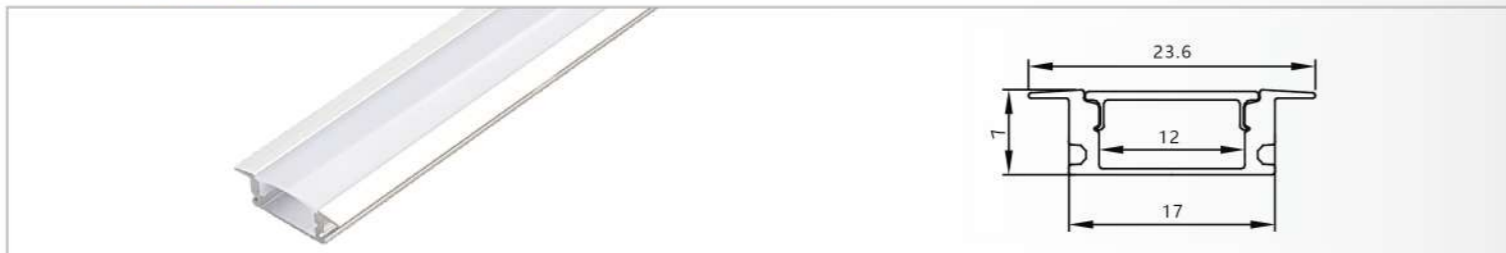

PXG 205-1



PXG 1201



PXG 3535A



PXG 5035A



PXG 7635A



PXG 1616



LINEAR PROFILE

Surface Profile



PXG 204



PXG 204-1



PXG 1202



PXG 3535M



PXG 5035M



PXG 5575M



PXG 7635M



OUTDOOR



ITEM NO : 9708
WATT : 30x0.2W
EPISTAR



ITEM NO : 1515
WATT : 4x1W
BRIDGELUX



ITEM NO : 1515
WATT : 4x1W
EPISTAR



ITEM NO : 9704B
WATT : 4x3W
BRIDGELUX

LIGHTING



ITEM NO : 9007
WATT : 25x0.2W
EPISTAR



ITEM NO : 5201C
WATT : 1x5W
BRIDGELUX



ITEM NO : 1501A
WATT : 1x3W
EPISTAR



ITEM NO : 1502A
WATT : 2x3W
BRIDGELUX


OUTDOOR



ITEM NO : 6108
WATT : 30x0.2W
EPISTAR



ITEM NO : 6125C
WATT : 2x3W CREE
+10X0.2W EPISTAR



ITEM NO : 1511
WATT : 4x1W
BRIDGELUX



ITEM NO : 9508
WATT : 50x0.2W
EPISTAR

LIGHTING



ITEM NO : 8813
WATT : 15x0.2W
EPISTAR



ITEM NO : 8812
WATT : 30x0.2W
EPISTAR



ITEM NO : 8839
WATT : 15x0.2W
EPISTAR



ITEM NO : 9528
WATT : 35x0.2W
EPISTAR

OUTDOOR



ITEM NO : 9803
WATT : 35x0.2W
EPISTAR



ITEM NO : 9804
WATT : 60x0.2W
EPISTAR



ITEM NO : 9805
WATT : 35x0.2W
EPISTAR



ITEM NO : 9806
WATT : 60x0.2W
EPISTAR

LIGHTING



ITEM NO : 6124B
WATT : 4x3W CREE
+10x0.2W EPISTAR



ITEM NO : 6117
WATT : 2x1W
BRIDGELUX



ITEM NO : 6118
WATT : 4x1W
BRIDGELUX



ITEM NO : 6119
WATT : 6x1W
BRIDGELUX

OUTDOOR LIGHTING



ITEM NO : 9837
WATT : 1x3W
BRIDGELUX/SANAN



ITEM NO : 9838
WATT : 2x3W
BRIDGELUX/SANAN



ITEM NO : 9829
WATT : 60x0.2W
EPISTAR

